

BIOMETRIC TERMINAL BIOPAD-A



Basic features

- 7" LCD Biometric Reader
- Verification using fingerprint, card or code
- Communication via TCP/IP or WiFi
- Support Emmarine 125 kHz cards
- Wiegand 26/34 bit



FINGERPRINT READER



EMMARINE CARDS READER



PIN CODE SUPPORT



SPECIFICATIONS

Verification mode	Fingerprint/Card/Code
Display	7" LCD Touch Screen
Resolution	800 × 480 px
Camera	2.0 MP
Fingerprint sensor	ZK Optical Sensor
Fingerprint log	200 000
Template	6 000 (1:N)
Max. users	10 000 transaction
Communications	TCP/IP, Wiegand, WiFi
Software application	P2P SYSDO CLOUD System
CPU	1,2 GHz Dual Core
Operating system	Android 4.1
RAM	1 GB
Flash memory	4 GB, SD card slot
Power supply	12V DC (3A)
Operation temperature	0 ~ 45 °C
Operation humidity	20 ~ 80 %
Dimension	220 × 134 × 51 mm
Weight	650 g



TCP/IP
communication

Standard WiFi

Wiegand output


Emmarline 125 kHz

7" LCD Touch Screen

Android 4.1



CLOUD SYSDO

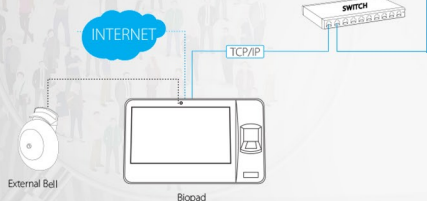

SYSDO

ON-LINE ATTENDANCE SYSTEM

The reader, in conjunction with the SYSDO portal, creates a comprehensive system of attendance and access. This will give you full control over the attendance of people anywhere in the world without the need to install software.

Try free demo at:
www.sysdo.eu