



SYSDO

ON-LINE ATTENDANCE SYSTEM

ACCESS READER SYSWB85



EMMARINE CARDS READER



PASSWORD KEYPAD



SYSDO SYSTEM SUPPORT

weather proof controller

Basic features

- IP access reader
- Verification using RFID cards or code
- Supports Emmarine 125 kHz cards
- Capacity up to 20 000 cards
- Waterproof cover IP65
- PoE function support (option)

Simple configuration

The Access Reader is prepared and configured with an account in the online attendance system SYSDO, where the reader can be completely configured according to the user's needs.

SYSWB85



SPECIFICATIONS

Verification mode	Card/Password
Two ways door control	Wiegand input
Wiegand	WG 26 ~ 66 bit
Cards	Emmarine 125kHz
Built-in relays	Door lock/ring
(Max. power loading)	(120VAC, 0.5A/30VDC, 1A)
Entry log	65 535
Card capacity	20 000
Software application	P2P SYSDO CLOUD System
Communications	TCP/IP RJ45, Wiegand, RS485
Power consumption	560 mA ± 5%
Power requirement	9 ~ 24VDC (1A)
Operation temperature	0 ~ 65 °C
Operation humidity	5 ~ 80 %
Weight	150 g
Dimension	120 × 80 × 28 mm


Password keypad

Weather proof IP65

Wiegand
input & output

RFID reader

Capacity
20000 card

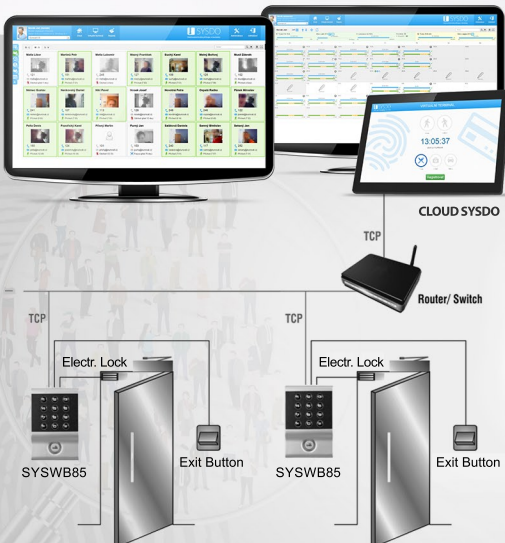

SYSDO

ON-LINE ATTENDANCE SYSTEM

The reader, in conjunction with the SYSDO portal, creates a comprehensive system of attendance and access. This will give you full control over the attendance of people anywhere in the world without the need to install software.

Try free demo at:
www.sysdo.eu